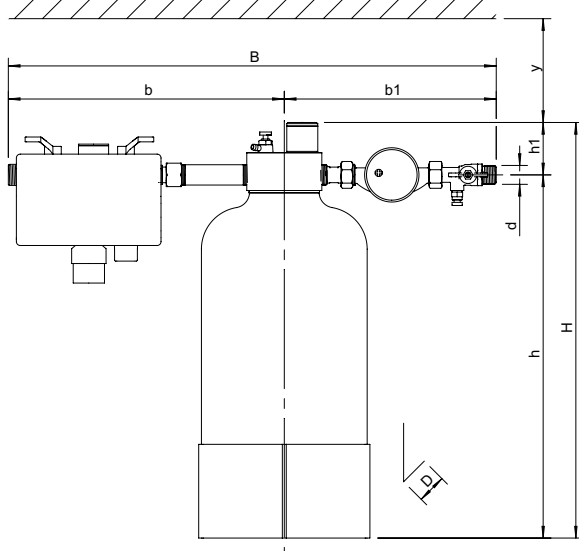


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
SpiroPure Pro 23.0 GLT			
Customer:		Type: G76.358	
Project:			
Reference:			
Design criteria Medium: Water Processing Capacity1200 l/h Max. Filling Capacity3420 l @420µS/cm to <100µS Min. Pressure:1.5 bar-g Max. pressure:8.0 bar-g Min. Temperature:5 °C Max. temperature:40 °C Connections Inlet / outletG3/4" Testing and quality assurance Test certificate:no Material certificates:no Compliance:VDI 2035, ÖNORM H 5195-1 SWKI BT 102-7 Construction materials Head:PVC ConnectionsBrass Tank basePP Tank thread:PA66 Tank winding:FRP Tank Inliner:HDPE LED housing:POM Cartridge:Polystyrol Resin:synthetic polymer		Drawing  Dimensions Height:682 mm Width:624 mm Depth:273 mm B624 mm b353 mm b1271 mm dG3/4" D273 mm H682 mm h615 mm h167 mm y240 mm Weight:26.7 kg Resin Volume:23 l LED Power:Battery - CR2450	
Subject to changes			