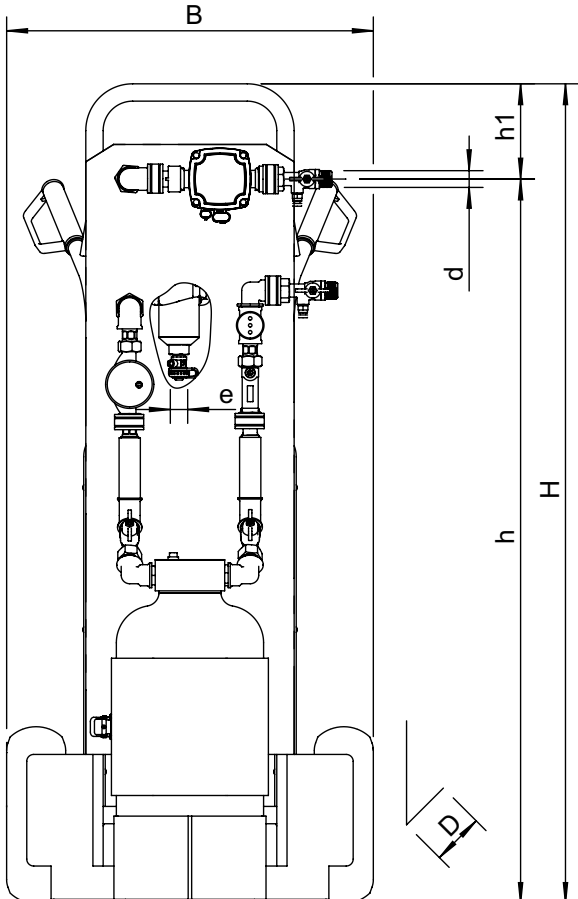


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
SpiroPure ProClean 23.0			
Customer:		Type:	G76.362
Project:			
Reference:			
Design criteria		Drawing	
Medium:	Water		
Processing Capacity	1200 l/h		
Max. Filling Capacity	3420 l		
@420µS/cm to <100µS			
Min. Pressure:	1.0 bar-g		
Max. pressure:	8.0 bar-g		
Min. Temperature:	5 °C		
Max. temperature:	80 °C		
Connections			
Inlet / outlet	G3/4"		
Dirt Drain	G3/4" (M)		
Testing and quality assurance			
Test certificate:	no		
Material certificates:	no		
Compliance:	VDI 2035, ÖNORM H 5195-1 SWKI BT 102-11		
Construction materials			
Head:	POM		
Connections	Brass		
Tank base	PP		
Tank thread:	PA66		
Tank winding:	FRP		
Tank Inliner:	HDPE		
Trolley	Aluminium, Plastic and rubber		
Backplate:	HDPE		
LED housing:	POM		
Cartridge:	Polystyrol		
Resin:	synthetic polymer		
MBL:	Brass		
		Dimensions	
		Height:	1182 mm
		Width:	528 mm
		Depth:	519 mm
		B	528 mm
		d	G3/4"
		D	519 mm
		e	G3/4" (M)
		H	1182 mm
		h	1045 mm
		h1	137 mm
		Weight:	47.5 kg
		Resin Volume:	23 l
		LED Power:	Battery - CR2450
		Pump Power:	230 V
Subject to changes			