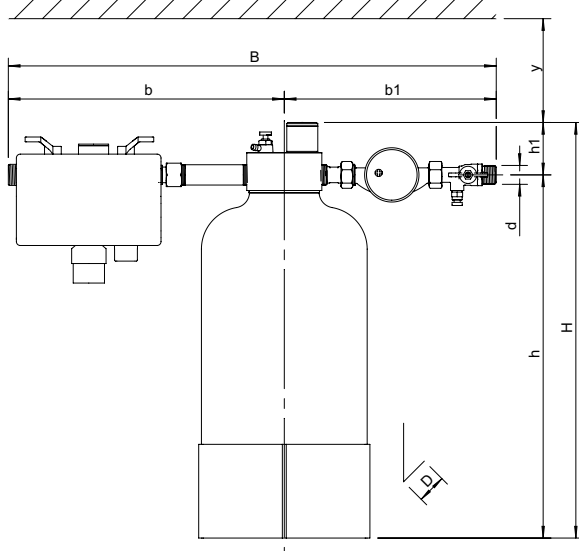


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
SpiroPure Pro 23.0			
Customer:		Type:	G76.356
Project:			
Reference:			
Design criteria		Drawing	
Medium:	Water		
Processing Capacity	1200 l/h		
Max. Filling Capacity	3420 l		
@420µS/cm to <100µS			
Min. Pressure:	1.5 bar-g		
Max. pressure:	8.0 bar-g		
Min. Temperature:	5 °C		
Max. temperature:	40 °C		
Connections			
Inlet / outlet	G3/4"		
Testing and quality assurance			
Test certificate:	no		
Material certificates:	no		
Compliance:	VDI 2035, ÖNORM H 5195-1 SWKI BT 102-7		
Construction materials		Dimensions	
Head:	PVC	Height:	682 mm
Connections	Brass	Width:	624 mm
Tank base	PP	Depth:	273 mm
Tank thread:	PA66	B	624 mm
Tank winding:	FRP	b	353 mm
Tank Inliner:	HDPE	b1	271 mm
LED housing:	POM	d	G3/4"
Cartridge:	Polystyrol	D	273 mm
Resin:	synthetic polymer	H	682 mm
		h	615 mm
		h1	67 mm
		y	50 mm
		Weight:	26.1 kg
		Resin Volume:	23 l
		LED Power:	Battery - CR2450
Subject to changes			