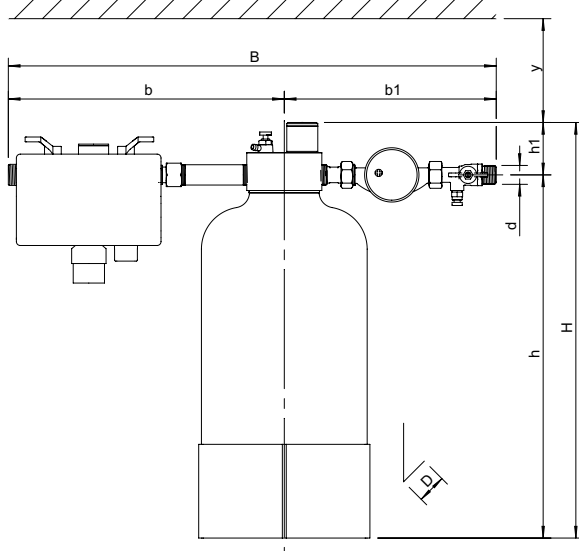


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
SpiroPure Pro 9.5			
Customer:		Type: G76.355	
Project:			
Reference:			
Design criteria		Drawing	
Medium:	Water		
Processing Capacity	600 l/h		
Max. Filling Capacity	1350 l		
@420µS/cm to <100µS			
Min. Pressure:	1.5 bar-g		
Max. pressure:	8.0 bar-g		
Min. Temperature:	5 °C		
Max. temperature:	40 °C		
Connections			
Inlet / outlet	G3/4"		
Testing and quality assurance			
Test certificate:	no		
Material certificates:	no		
Compliance:	VDI 2035, ÖNORM H 5195-1 SWKI BT 102-6		
Construction materials			
Head:	PVC	Dimensions	
Connections	Brass	Height:	532 mm
Tank base	PP	Width:	624 mm
Tank thread:	PA66	Depth:	221 mm
Tank winding:	FRP	B	624 mm
Tank Inliner:	HDPE	b	353 mm
LED housing:	POM	b1	271 mm
Cartridge:	Polystyrol	d	G3/4"
Resin:	synthetic polymer	D	221 mm
		H	532 mm
		h	465 mm
		h1	67 mm
		y	50 mm
		Weight:	12.2 kg
		Resin Volume:	9.5 l
		LED Power:	Battery - CR2450
Subject to changes			