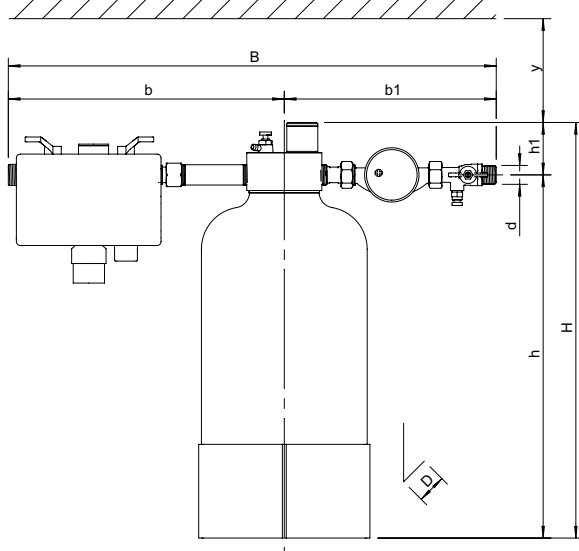


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
SpiroPure Pro 9.5 GLT			
Customer:		Type: G76.357	
Project:			
Reference:			
Design criteria Medium: Water Processing Capacity600 l/h Max. Filling Capacity1350 l @420µS/cm to <100µS Min. Pressure:1.5 bar-g Max. pressure:8.0 bar-g Min. Temperature:5 °C Max. temperature:40 °C		Drawing 	
Connections Inlet / outlet G3/4"			
Testing and quality assurance Test certificate: no Material certificates: no Compliance: VDI 2035, ÖNORM H 5195-1 SWKI BT 102-6			
Construction materials Head: PVC ConnectionsBrass Tank basePP Tank thread: PA66 Tank winding: FRP Tank Inliner: HDPE LED housing: POM Cartridge: Polystyrol Resin: synthetic polymer		Dimensions Height: 532 mm Width: 624 mm Depth: 221 mm B624 mm b353 mm b1271 mm dG3/4" D221 mm H532 mm h465 mm h167 mm y240 mm Weight: 12.8 kg Resin Volume: 9.5 l LED Power: Battery - CR2450	
Subject to changes			