

# Product data sheet Spirotech

## Product name

**SpiroTop Solar -1/2" -AutoClose**

## Product properties

A brass automatic air vent - AutoClose for solar systems with a 1/2" connection

- Specially developed for Solar (high temperature) installations
- Applicable with max. 20% - 50% Ethylene Glycol and water (Volume)
- Removes circulating and trapped air
- Greatly reduces commissioning times
- Minimal constant pressure drop
- No unnecessary shutdown
- Long lasting valve seat
- Connection diameters 1/2"
- Prevents stagnation
- Solar fluid will not prematurely degenerate
- System will not boil dry via the air vent
- No more climbing the roof to remove free air
- Permanent air-free, efficient installation
- Suitable for new and existing installations


## Article number

**AB050FBA08**

## Product image



## Product dimensions

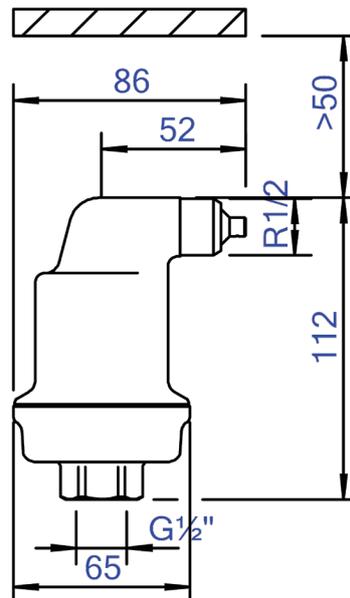

# Product data sheet Spirotech

## ETIM product data

Height	112 mm
Housing material	Brass
With leakage protection	Yes
With air intake barrier	No
Angle connection	No
Nominal diameter	1/2 inch (15)

Material float	Plastic
Max. medium temperature (continuous)	180 °C
Lockable	No
Max. operating pressure at 20 °C	10 bar
Material quality float	Polymethylpentene (PMP)

### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

