

# Product data sheet Spirotech

## Product name

**SpiroPure ProFill 9.5**

## Product properties

The SpiroPure ProFill products are mobile filling units, which are not permanently fixed to the installation. They are only used to fill the system, and are removed after usage.


## Article number

**G76.359**

## Product image



## Product dimensions

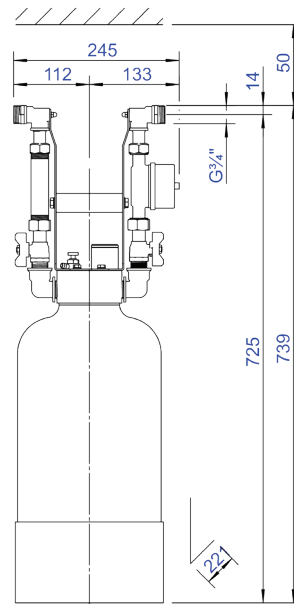

# Product data sheet Spirotech

## ETIM product data

Height	739 mm
Max. operating pressure	8 bar
With insulation	No
With drain funnel	No
With pressure reducer	No
Size of cartridge	9.5 l
Suitable for softening	Yes
Max. temperature at the inlet	40 °C
Max. temperature at the outlet	40 °C
Suitable for full demineralization	Yes
Connections	External thread conical BSPT-R (ISO 7-1 / EN 10226-1)
Suitable for pH value stabilization	Yes
With pressure gauge	No

Suitable for fixed installation	Yes
Suitable for mobile use	No
Nominal diameter	3/4 inch (20)
With filter	No
With de-aerator	No
With automatic filling function	No
Filling capacity	600 l/h
Width	245 mm
Depth	221 mm
Pressure	1 - 8 bar
Suitable for membrane pressure expansion tank	Yes
Suitable for compressor-controlled automatic expansion unit	No

### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

