

Product data sheet Spirotech

Product name

SpiroVent Superior S600 -Refill -AISI316

Article number

MV06R50A01


Product properties

The SpiroVent Superior S600 Stainless Steel has been developed specifically for modern data center cooling systems where reliable removal of free and dissolved air is essential for maximum cooling efficiency and system uptime. Based on the proven SpiroVent S600 technology, the Stainless Steel version combines highly effective vacuum degassing with a robust AISI 316 stainless-steel construction. The product is designed for chilled water systems and tech water systems in data centers.

- Specifically made for modern data center cooling systems
- Applicable for systems with pressures between 2.5 & 6 bar
- Removes all gases, free air, microbubbles and dissolved gases
- Absorptive fluid ensures the removal of trapped gas bubbles
- Easy installation, reducing commissioning and handover
- Energy-efficient whilst still achieving the lowest possible gas concentration thanks to SmartSwitch
- Degassed (re)filling and sustained pressure
- Warns before (re)filling becomes excessive
- Can team up with all common expansion systems
- Remote access via LAN or Wi-Fi
- Two-year guarantee



Product dimensions

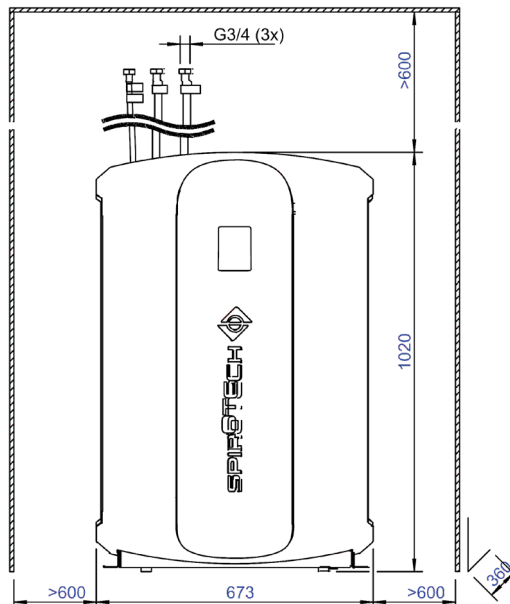

Product data sheet Spirotech

ETIM product data

Height	1020 mm
With insulation	No
Max. glycol mixture	40 %
Article compression class	PN 10
Suitable for closed system	Yes
Max. installation content	325000 l
Width	673 mm
Depth	360 mm
Connection voltage	207 - 253 V
Max. flow rate	1000 l/h
Connection size inlet	3/4 inch
Connection inlet	Internal thread cylindrical BSPP-G (ISO 228-1)
Connection size outlet	3/4 inch
Connection outlet	Internal thread cylindrical BSPP-G (ISO 228-1)
Connection size refill/top-up	3/4 inch
Connection type refill/top-up	Internal thread cylindrical BSPP-G (ISO 228-1)
Frequency	50 Hz

Sound pressure level	57 dB(A)
Ambient temperature	0 - 40 °C
Degree of protection (IP)	IP44
Operating pressure	2.5 - 6 bar
With backflow safeguard	Yes
LAN connection	Yes
Max. electric power input	0.8 kW
Wi-Fi	Yes
With communication interface RS-485	Yes
Communication interface inverter MOD-Bus	Yes
Bluetooth	No
Supporting protocol for BACnet	No
Potential free switch contact	Yes
Touchscreen operation	Yes
Remote controllable function	Yes
Nominal current	5.1 A

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

