
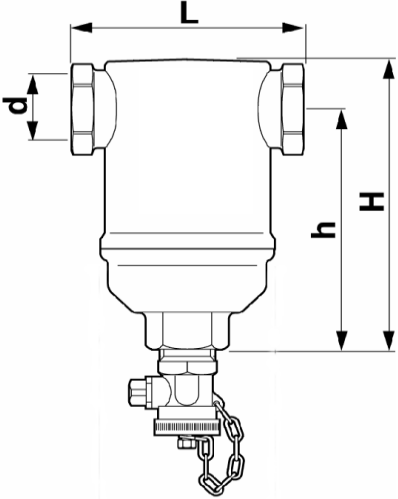


<b>SPIROTECH SPECIFICATION SHEET</b>		<b>SPIROTECH</b> 	
Version 16.1 / BDB			
Product: SpiroTrap 1" Threated fitting		Type: AE100	
Customer:			
Project:		Date: 16-3-2016	
Reference:			
<b>Design criteria</b>		<b>Drawing:</b>	
Medium:	Water / glycol (max 50%)		
Max. flow velocity:	1 m/s		
Max. flow rate:	2,00 m3/h		
Max. pressure:	10 bar-g		
Max. temperature:	110 °C		
Design standard:	EN 13445		
<b>Testing and quality assurance</b>			
Leakage test:	no		
Test certificate:	no		
Design and manufacturing acc. 97/23/EC:	yes		
Material certificates (structural parts):	no		
Drawing:	no		
<b>Construction materials</b>		<b>Dimensions:</b>	
Body:	Brass	d	1" mm
Drain valve:	Brass	H	143 mm
Spirotube Tube:	S235 JR G2 (St.37)	h	108 mm
Wire:	Copper	L	88 mm
Solder:	Tin(SnCu3)		
		Volume:	0,21 ltr
		Dry weight (approx):	1,2 kg
		Subject to changes	