
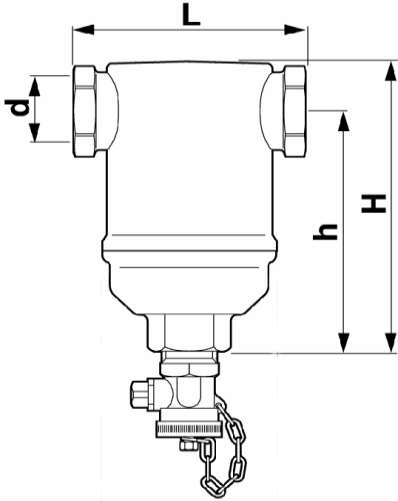


<b>SPIROTECH SPECIFICATION SHEET</b>		<b>SPIROTECH</b> 	
Version 16.1 / BDB			
Product: SpiroTrap 1 1/4" Threated fitting		Type: AE125	
Customer:			
Project:		Date: 16-3-2016	
Reference:			
<b>Design criteria</b>		<b>Drawing:</b>	
Medium: Water / glycol (max 50%)			
Max. flow velocity: 1 m/s			
Max. flow rate: 3,60 m3/h			
Max. pressure: 10 bar-g			
Max. temperature: 110 °C			
Design standard: EN 13445			
<b>Testing and quality assurance</b>			
Leakage test: no			
Test certificate: no			
Design and manufacturing acc. 97/23/EC: yes			
Material certificates (structural parts): no			
Drawing: no			
<b>Construction materials</b>		<b>Dimensions:</b>	
Body: Brass		d 1 1/4"	
Drain valve: Brass		H 161 mm	
Spirotube Tube: S235 JR G2 (St.37)		h 121 mm	
Wire: Copper		L 88 mm	
Solder: Tin(SnCu3)			
		Volume: 0,25 ltr	
		Dry weight (approx): 1,3 kg	
		Subject to changes	