
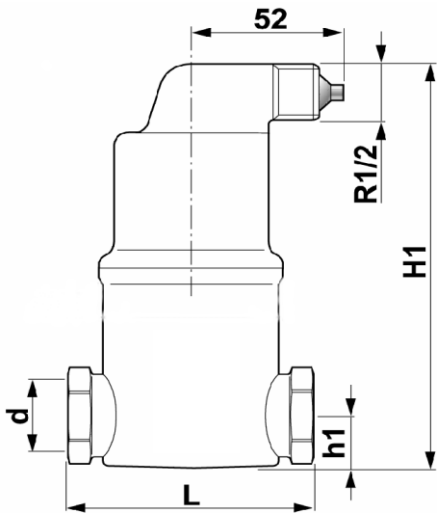


| SPIROTECH SPECIFICATION SHEET | | SPIROTECH  | |
|---|--------------------------|--|----------|
| Version 16.1 / BDB | | | |
| Product: SpiroVent deaerator 22 mm Compression fitting | | Type: AA022 | |
| Customer: | | | |
| Project: | | Date: 16-3-2016 | |
| Reference: | | | |
| Design criteria | | Drawing: | |
| Medium: | Water / glycol (max 50%) |  | |
| Max. flow velocity: | 1 m/s | | |
| Max. flow rate: | 1,30 m3/h | | |
| Max. pressure: | 10 bar-g | | |
| Max. temperature: | 110 °C | | |
| Design standard: | EN 13445 | | |
| Testing and quality assurance | | | |
| Leakage test: | no | | |
| Test certificate: | no | | |
| Design and manufacturing acc. 97/23/EC: | yes | | |
| Material certificates (structural parts): | no | | |
| Drawing: | no | | |
| Construction materials | | Dimensions: | |
| Body: | Brass | d | 22 mm |
| Deaeration cap: | Brass | H1 | 153 mm |
| Valve sealing: | Viton | h1 | 20 mm |
| Float: | PP | L | 106 mm |
| Spirotube Tube: | S235 JR G2 (St.37) | | |
| Wire: | Copper | | |
| Solder: | Tin(SnCu3) | | |
| | | Volume: | 0,18 ltr |
| | | Dry weight (approx): | 1,2 kg |
| Subject to changes | | | |